

MEPROLIGHT® SIGHTS

- SET
- F.S.
- R.S.

ML-20996 TRU-DOT® Adjustable Night Sight System for Ruger GP-100 and Super Redhawk Revolvers


Installation Instructions

WARNING: This sight set contains a small quantity (54 millicuries or less) of radioactive tritium in gaseous form. No attempt must be made to disassemble the sights. If a sight is defective, please contact the distributor shown on the reverse side of this page for instructions – or, if outside the US, please contact your local distributor.

WARNING: Before starting, make sure the weapon is unloaded.

NOTE: BEFORE CONTINUING, READ WARRANTY AND RECORD LOT NUMBER (2 letters, normally found on the bottom surface of the rear sight).

NOTE: The sketch below is intended to present a visual representation of the orientation of the weapon and its sights.

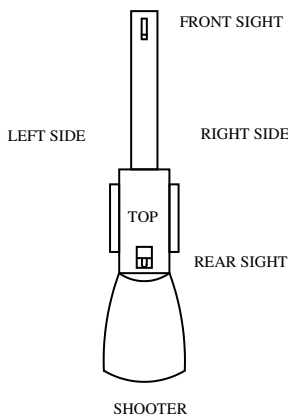

Front Sight Removal

The front sight is held in place by means of a spring and plunger which keeps pressure against the sight in its retaining slot. To remove the sight, use a drift punch to depress the plunger and, while holding it in the depressed position, push the front sight towards the rear of the weapon and lift it out of the retaining slot. Make sure that the plunger and its spring don't fall out since they are necessary for assembly of the new front sight.

Rear Sight Removal

Unscrew the elevation screw sufficiently to release it from the weapon. Remove the rear sight pivot pin from either side of the weapon, and save the pin and the two springs which are held underneath the mechanism. Remove the elevation screw from the mechanism and save it for assembly of the new sight.

NOTE: Do not use a drift punch to remove tritium sights being returned for evaluation under warranty. Damage caused by a drift punch may void the warranty

ML-20996 Sights - Installation

CAUTION: These sights contain small glass ampules (the tritium light inserts), and should not be subjected to severe direct impact. To avoid damage, install the sights using a sight pusher designed to push on the area of the sight's base or dovetail, and not high up where the light inserts are housed. Use of a drift punch or other improper tools that damage the sights will void the warranty.

Front Sight Installation

Use a drift punch to depress the plunger and, while holding it in the depressed position, insert the new ML-20996 front sight, pushing it towards the rear of the weapon and down into the retaining slot. Release the plunger and the sight is held firmly in place.

Rear Sight Installation

Assemble the elevation screw to the new ML-20996 rear sight mechanism, place the two springs in position and insert the pivot pin to attach the sight. Screw in the elevation screw until it has firmly engaged the weapon. The new ML-20996 rear sight is now installed and ready for adjustment in accordance with the standard sighting-in procedures.

MEPROLIGHT® SIGHTS

Made in Israel
Manufactured by:
MEPROLIGHT

An ISO 9001 Quality Company
ISO14001 environment
OHSAS 18001 safety

For inquiries, please contact:

USA
e-mail: sales@meprolight.us
e-mail: support@meprolight.us
www.meprolight.us

International (Except The USA)
e-mail: sales@meprolight.com
e-mail: support@meprolight.com
www.meprolight.com

REV F