

MEPROLIGHT® SIGHTS

□ ML-31506

□ ML-31505

- SET
- F.S.
- R.S.

**Night Sight System
for H&K Rifles
MP5, M91, M93, M94**

Installation Instructions


WARNING: This sight set contains a small quantity (54 millicuries or less) of radioactive tritium in gaseous form. No attempt must be made to disassemble the sights. If a sight is defective, please contact the distributor shown on the reverse side of this page for instructions – or, if outside the US, please contact your local distributor.

WARNING: Before starting, make sure the weapon is unloaded.

NOTE: BEFORE CONTINUING, READ WARRANTY AND RECORD LOT NUMBER (1 or 2 letters, normally found on the bottom surface of the rear sight).

If you are unsure about installing the sights or do not have the proper tools, contact a qualified gunsmith to perform the work.

NOTE: The sketch below is intended to present a visual representation of the orientation of the weapon and its sights.

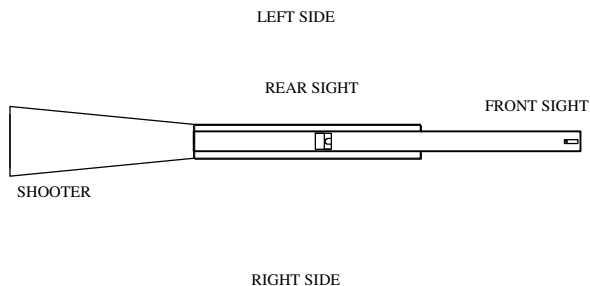

Front Sight Removal

Using a suitable tool, push out the roll pin, from the rear toward the front, which holds the front blade in place. Discard the blade, but keep the roll pin for use in assembling the new ML-31506 front sight.

ML-31505/6 Sight – Installation

CAUTION: These sights contain small glass ampules (the tritium light inserts), and should not be subjected to severe direct impact. Use of improper tools that damage the sights will void the warranty.

Front Sight Installation

The ML-31505/6 front sight consists of a ring-shaped guard, which fits into the slot previously occupied by the old sight blade, and the new illuminated front sight.

Insert the ring-shaped guard into the old sight blade slot, and then place the new front sight into the slot, such that the imbedded tritium light is facing the shooter. Using a suitable tool, push the roll pin in place, from the front toward the rear.

Rear Sight Installation

Remove the screw and spring washer holding the original rear sight in position, and discard them. Place the spacer into the matching cutout area in the original sight base. Then place the new spring washer and screw through the ML-31506 illuminated sight bracket and fasten it onto the original sight base such that the imbedded tritium lights are facing the shooter.

MEPROLIGHT® SIGHTS

Made in Israel

Manufactured by:
MEPROLIGHT

An ISO 9001 Quality Company
ISO14001 environment
OHSAS 18001 safety

For inquiries, please contact:

USA

e-mail: sales@meprolight.us
e-mail: support@meprolight.us
www.meprolight.us

International (Except The USA)

e-mail: sales@meprolight.com
e-mail: support@meprolight.com
www.meprolight.com

REV G