

MEPROLIGHT® SIGHTS

ML-34302

Night Sight System for
BENELLI
M1S90 & M4 Shotguns
with Ghost Ring
(Manufactured after
2001), M3-A1 Cal. 12

- SET
- F.S.
- R.S.

Installation Instructions


WARNING: This sight set contains a small quantity (54 millicuries or less) of radioactive tritium in gaseous form. No attempt must be made to disassemble the sights. If a sight is defective, please contact the distributor shown on the reverse side of this page for instructions – or, if outside the US, please contact your local distributor.

WARNING: Before starting, make sure the weapon is unloaded.

NOTE: BEFORE CONTINUING, READ WARRANTY AND RECORD LOT NUMBER (1 or 2 letters, normally found on the bottom surface of the rear sight).

If you are unsure about installing the sights or do not have the proper tools, contact a qualified gunsmith to perform the work.

NOTE: The sketch below is intended to present a visual representation of the orientation of the weapon and its sights.

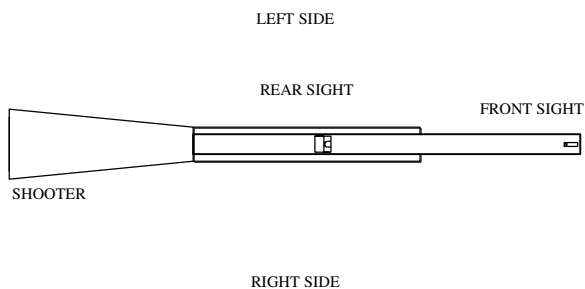

Front Sight Removal

To remove the front sight, unscrew the nut on the base of the front post, located under the mounting bracket. Save the nut for assembly of the new front sight.

Rear Sight Removal

The rear sight blade is held in place by the windage adjustment screw. To remove the sight blade, simply unthread the screw, remove it, and push the sight out of the slot in which it is seated. There is a spring held in place by the screw and sight blade. Take care not to lose this spring when removing the blade.

ML-34302 Sight - Installation

CAUTION: These sights contain small glass ampules (the tritium light inserts), and should not be subjected to severe direct impact. Use of improper tools that damage the sights will void the warranty.

Front Sight Installation

Insert the ML-34302 front sight post into the mounting bracket such that the embedded tritium light is facing the shooter. Fasten the post in place by securely tightening the nut to the post base extending under the mounting bracket.

Rear Sight Installation

To install the new ML-34302 rear blade, put the end of the spring into the cavity of the sight blade and, while holding the spring in a compressed state, insert the sight blade into the slot (from the top) such that the tritium light sources are facing the shooter. Align the spring and sight such that the screw can be inserted, and then thread the screw into the sight blade until it is in position.

Sighting-In

WARNING: Before each sight adjustment, make sure your weapon is unloaded.

Adjustment of the rear sight is identical to that of the original sight.

MEPROLIGHT® SIGHTS

Made in Israel

Manufactured by:
MEPROLIGHT

An ISO 9001 Quality Company
ISO14001 environment
OHSAS 18001 safety

For inquiries, please contact:

USA

e-mail: sales@meprolight.us
e-mail: support@meprolight.us
www.meprolight.us

International (Except The USA)

e-mail: sales@meprolight.com
e-mail: support@meprolight.com
www.meprolight.com

REV H